




Safari Aurora II


Luxury and durability in the rough.

The Safari Aurora II is easily set up even in the roughest environs. With its sturdy build and weather-resistant materials, the Aurora II promises resilience against harsh weather conditions. The 11.2m² (120.5ft²) interior boast a generous layout with cozy furnishings, and well-ventilated spaces for a serene and revitalizing retreat. Utilizing eco-friendly materials such as PVC and aluminum, the Aurora line employs construction methods that minimize environmental impact while maximizing sustainability.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

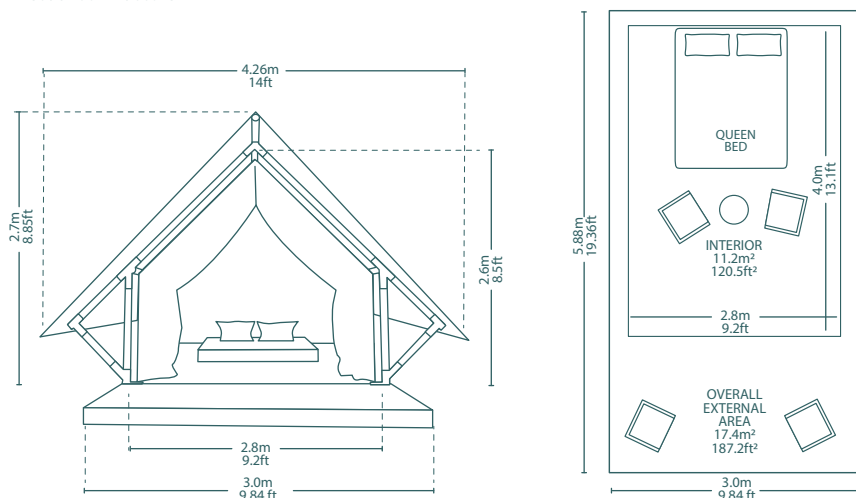

SPECIFICATIONS

Outer Dimension 4.26m x 5.88m x 2.7m
WxLxH (14ft x 19.36ft x 8.85ft)

Outer Area 25m² (270 ft²)

Platform Size 3.0m x 5.88m
WxL (9.84ft x 19.36ft)

Inner Dimension 2.8m x 4.0m x 2.6m
WxLxH (9.2ft x 13.1ft x 8.5ft)

Inner Area 11.2m² (120.5ft²)

Max Wind Load 130km/h (80mph)
-to increase wind load rating please contact.

Package size 4m x 1m x 0.4m (1.6m³)
WxLxH 13.1ft x 3.3ft x 1.3ft (56.5ft³)

Package weight 220kg (485lbs)

MATERIALS

Roof Fabric 650 g/m² double-coated opaque PVC (dark green), waterproof, UV resistant, flame retardant B1.

Sidewall 900D Oxford cloth with ventilation and zipper door ; PU waterproofness 5000mm; mildew-resistant; fire retardant CA117.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 0.8m x 0.6m (2.6ft x 2ft)
Windows per tent 2

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 70mm dia, 1.5mm thickness, wood pattern.

Connector 76mm x 2mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING