




Safari Solstice I


A unique footprint in the sand.

The frame of the Safari Solstice I is constructed with aeronautical-grade 6063-T6 aluminum alloy giving it a solid structure that can withstand winds of up to 130 km, driving snow, or hammering rain. The overall life cycle can reach 3-5 years with 1 year warranty. Safari Solstice I can be rapidly deployed and provides exceptional comfort to campers and glampers in a variety of outdoor environments with its roomy inner tent, padded flooring, and available interior decor.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

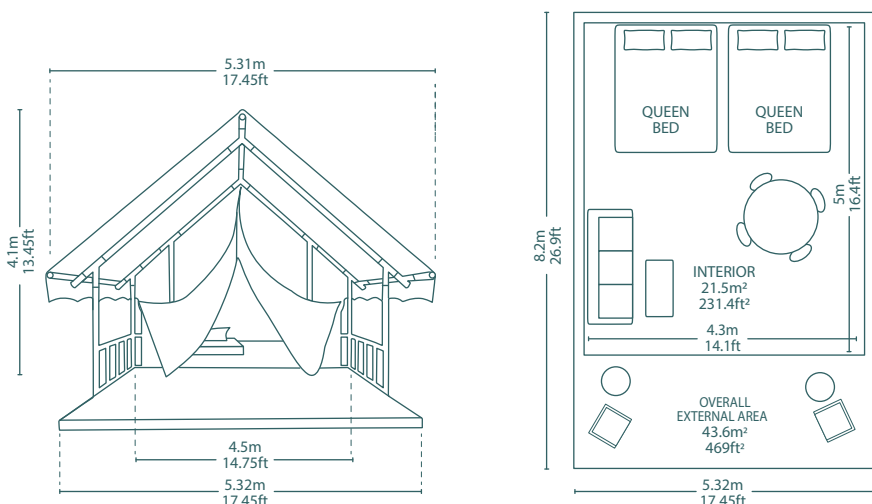

SPECIFICATIONS

Outer Dimension WxLxH	5.31m x 8.2m x 4.1m (17.45ft x 26.9ft x 13.45ft)
Outer Area	43.5m² (469ft²)
Platform Size WxL	5.32m x 8.2m (17.45ft x 27.0ft)
Inner Dimension WxLxH	4.3m x 5m x 3.9m (14.1ft x 16.4ft x 12.8ft)
Inner Area	21.5m² (231.4ft²)
Max Wind Load	130km/h (80mph) -to increase wind load rating please contact.
Package size WxLxH	5m x 1m x 0.6m (2.1m³) 16.4ft x 3.3ft x 2ft (74.1ft³)
Package weight	400kg (882.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Sidewall 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net and zipper door. Waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 90mm dia, 1.8mm thickness, wood pattern.

Connector 95mm x 1.5mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING