




Safari Solstice III


Glamping plans aren't set in stone.

Luna Safari tents are adaptable to different locations, from lush forests to sandy beaches and rugged mountains. The interior of the Solstice III can be customized to enhance comfort and luxury. From plush bedding and stylish furnishings to modern amenities such as heating, air conditioning, solar power, and even ensuite bathrooms, the Solstice III offers a high level of comfort comparable to that of a traditional cabin.


Leaders in frame strength and durability



Etched aluminum framework and steel connectors




Fully adjustable anti-slip buckles



Reinforcement tightening



Ratchet strap tensioners

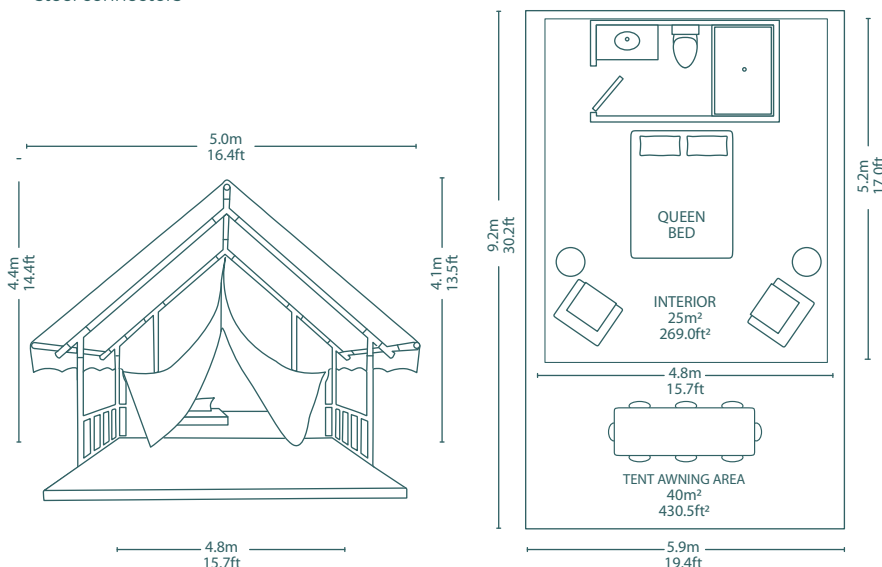

SPECIFICATIONS

Outer Dimension WxLxH	5.0m x 8.0m x 4.4m (16.4ft x 26.2ft x 14.4ft)
Outer Area	40m ² (430.5ft ²)
Platform Size WxL	5.9m x 9.2m (19.4ft x 30.2ft)
Inner Dimension WxLxH	4.8m x 5.2m x 4.1m (15.7ft x 17.0ft x 13.5ft)
Inner Area:	25.0m ² (269.0ft ²)
Max Wind Load - to increase wind load rating please contact.	130km/h (80mph)
Package size WxLxH	8m x 1m x 0.6m (2.28m ³) 26.3ft x 3.3ft x 2ft (80.5ft ³)
Package weight	450kg (992.0lbs)

MATERIALS

Roof Fabric 750 g/m² double-coated opaque PVC (beige), waterproof, UV resistant, flame retardant B1.

Sidewall 370 g/m² Canvas, including 1.2m x 0.8m window w/ mosquito net and zipper door. Waterproof; mildew-resistant; fire retardant.

Insulation (optional add-on) 1 or 2 layer aluminum foil bubble insulation + canvas fabric. Radiation heat reflection coefficient 85%, waterproof, fire retardant.

Window size 1.2m x 0.8m (3.9ft x 2.6ft)
Windows per tent 4

Ground Lining 480 g/m² beige PVC.

Framework 6063-T6 aluminum alloy, 90mm dia, 1.8mm thickness, wood pattern.

Connector 95mm x 1.5mm black Q235B steel.

Netting 40gsm white.

Rope 6mm nylon ropes.

Stakes 5mm steel.



RUGGED



COZY



DURABLE



SAFE



ENGINEERED

LUNA
GLAMPING

www.lunaglamping.com 8